



# Banknote Banding Machine

JB-A2LA

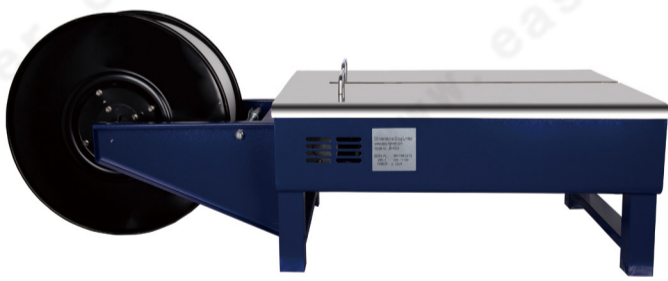

Easy Banker International Co., Ltd  
[www.easy-banker.com](http://www.easy-banker.com)



## Features:

- Durable electro-magnetic clutch transmission, lesser wear and lower noise.
- Standard accessory, it's advantage is stable quality, durable material, and easy maintenance.
- Special design-Control PP strap cooling time. It can make the PP strap to fasten well in any time.
- "Electricity-saving" device, the motor automatically stops running after 60 seconds pause to reduce the normal wear and to prolong the machine life.
- The advanced P.C.B microchip circuit board control system, less malfunction and easy maintenance.
- Non-fast heater plate, it will increase the work efficiency.
- Installing an auxiliary feed switch and cut switch at the control panel makes you operate more conveniently.
- The table strapping machine is mainly used for strapping and packing small-sized articles such as banknote, instruments, parcels and prints widely used in various trades of finance, post and commerce. The machine is small in size, light in weight, low in noise, rapid in speed and easy in operation, which can be used for adjusting strapping tension as a piece of ideal office equipment.

## Specifications:

Power supply: AC220V 50/60Hz 0.25KW

Strapping speed: 3 seconds/lane

Binding power: 3~45kg

Height of working table: 450mm

Bonding mode: hot melt bonding at the bottom

External dimension: 750mm\*550mm\*450mm

Machine weight: 60kg

Operating noise: < 75dB (A)

Specification of binding tape:

polypropylene width of 5mm~15mm

thickness 0.5mm-0.8mm

Width of roll: 160mm~190mm

Inner diameter of the tape coil: 200mm~210mm

outer diameter: 400mm~500mmz



EB International Group Limited  
[www.easy-banker.com](http://www.easy-banker.com)